

GENUINE KMAC... ALSO INCLUDES SEPARATE RADIAL THRUST **BEARINGS FOR STEERING LOADS! PREVENT SPRING DRAG / BINDING**

11

111

CLAMP PLATE

1. KMAC Coil Seat (if OEM diam. Springs)

Use smaller elastomer Seats

60^{mm} O.D (or 65^{mm} O.D if up to

70^{mm} Coil overs) fitted.

KMAC

ത

STREET / RACE CAMBER & CASTER Biggest Adjustment Range

STAGE 2 - Extra H/Duty Spherical Bearings (PTFE lined) - Self aligning with Elastomer mounts to extend life

Fit (and can) adjust with strut brace Fit With or Without Adj. Coil Overs (60-70mm I.D.) Centers are Replaceable for virtual lifetime usage

Simply replaces original strut 'upper' mounts (All items above Coil spring except for OEM dust cover)

2. KMAC BUMP STOP

If lowering can cut top

section of bump stop

to increase shock

STRUT

TOWER




Kit (Centers) are 'Left' and 'Right' hand offsets THEREFORE BEFORE INSTALLING / ADJUSTING (Select Center hole position that will achieve best results!)

Refer manufacturers workshop manual re removal and installation Observe all safety procedures



- A. From engine bay, loosen the '3' top nuts for strut tower upper mount.
- B. Use large screwdriver to lever / ratchet KMAC adjuster mount crossways for CAMBER, then lengthways for required CASTER.
- Once optimum settings, tighten the 'TOP' KMAC NUTS to 27Nm (20ft/lbs). **C**.

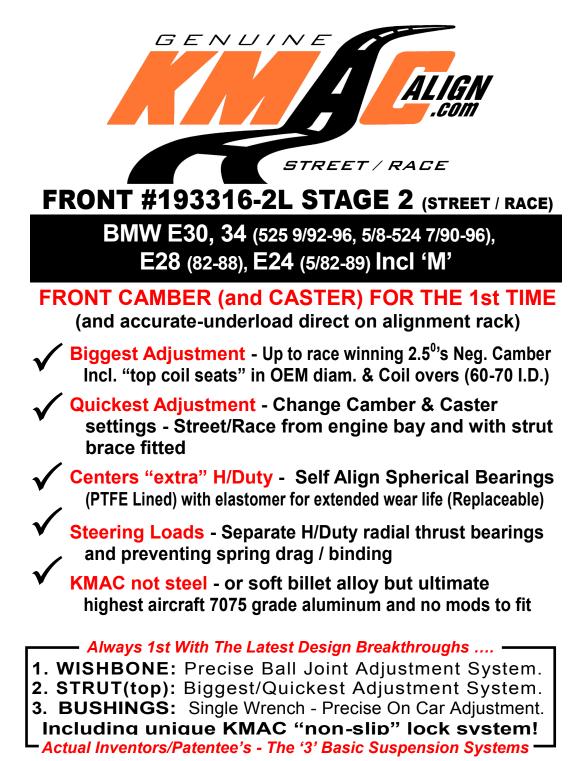

We do appreciate any ideas to further improve our market leadership !